


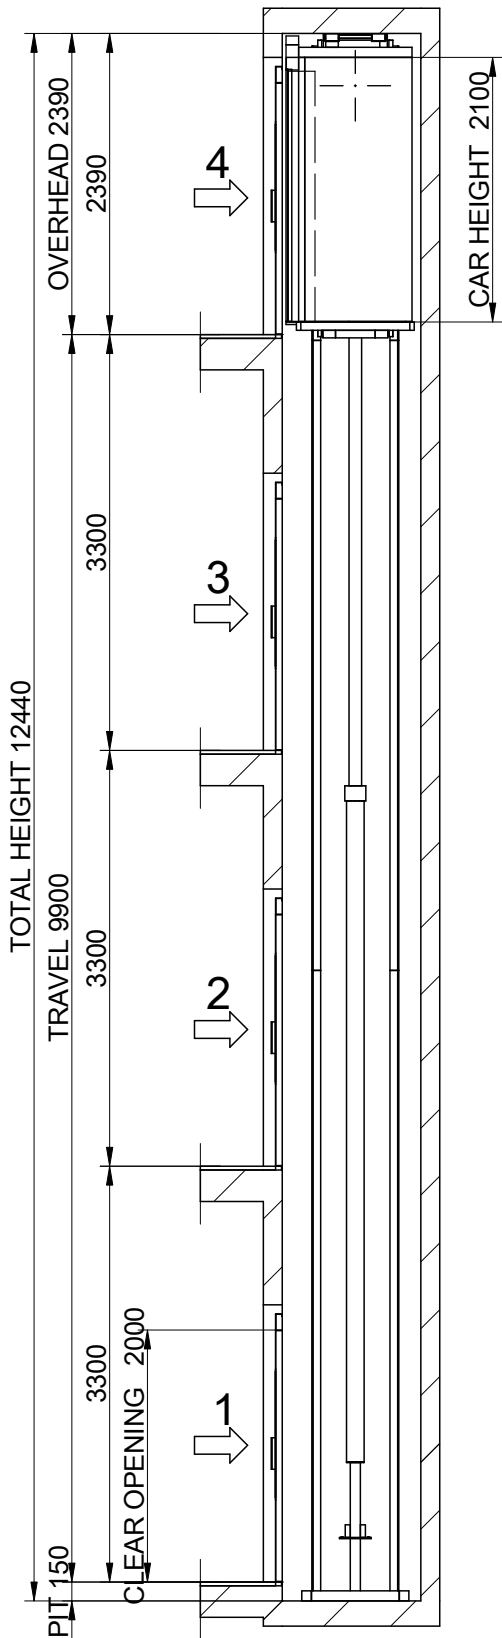
PLAN VIEW

SCALE⁽¹⁾: 1:15

F-1-602.rev.3

(¹)Unbounded dimensions in drawings are indicative and not binding.

STOPS (N°)		4	REV. 0		
CAPACITY (N° PERSONS)		3	REFERENCE:		
NOMINAL LOAD (Kg.)		225			
	DATE	NAME	CLIENT:		TENSION (V.) TRIFASICO.380V FREQUENCY (Hz.) 50
DRAWING	2011		WORK SITUATION:		
VERIFIED					
APPROV.					
MP			MODEL LIFT		SPEED (m/s)
			MP301H MOBI		0.15



SIDE VERTICAL SECTION


SCALE("): 1:60

Slack-rope checking assembly must be removed once the safety gear test are done. Its location will be in MR or MRL cabinet.


Flat and levelled floor, protected against water leaking.
(EN81-2:98, 5.7.2.1)
Foresee pit access device
(EN81-2:98, 5.7.2.2)
Stop device
(EN81-2:98, 5.7.2.5)
Power supply
(EN81-2:98, 5.7.2.5)
Light swicht
commuted with the cabinet.
(EN81-2:98, 5.7.2.5)
Telephone jack (except Fonotec)
(EN81-2:98, 5.10)

F-1-602.rev.3

(1)Unbounded dimensions in drawings are indicative and not binding.

STOPS (N°)		REV. 0		 	
CAPACITY (N° PERSONS)		REFERENCE:			
NOMINAL LOAD (Kg.)		225			
DATE	NAME	CLIENT:		TENSION (V.)	
DRAWING	2011	WORK SITUATION:		TRIFASICO.380V	
VERIFIED				FREQUENCY (Hz.)	
APPROV.				50	
<div>MP</div>		MODEL LIFT		SPEED (m/s)	
		MP301H MOBI		0.15	

R1:25000 N
R2:26400 N
R3:15000 N
Sx:3000 N
Sy:200 N

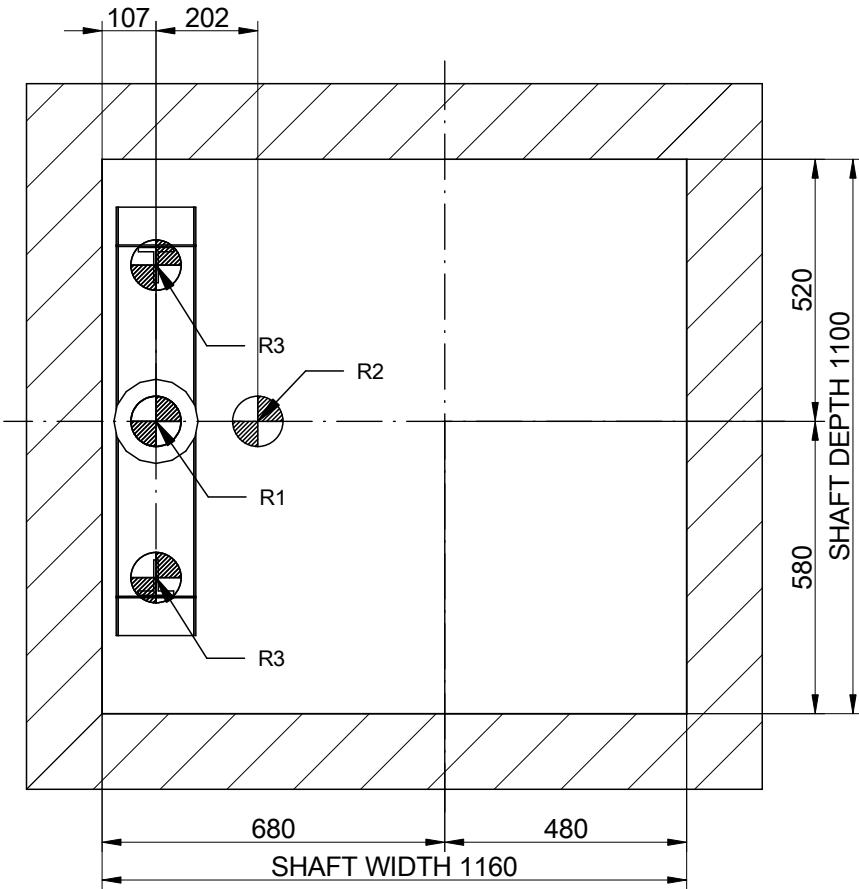


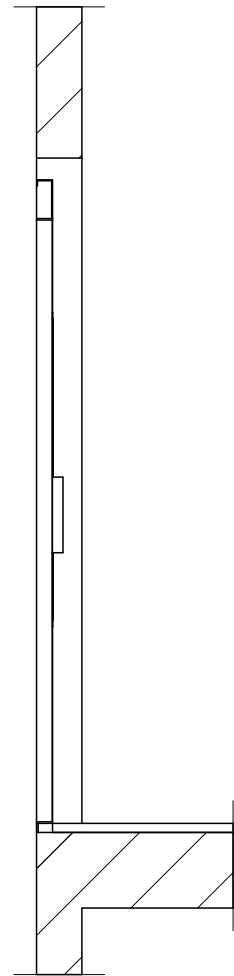
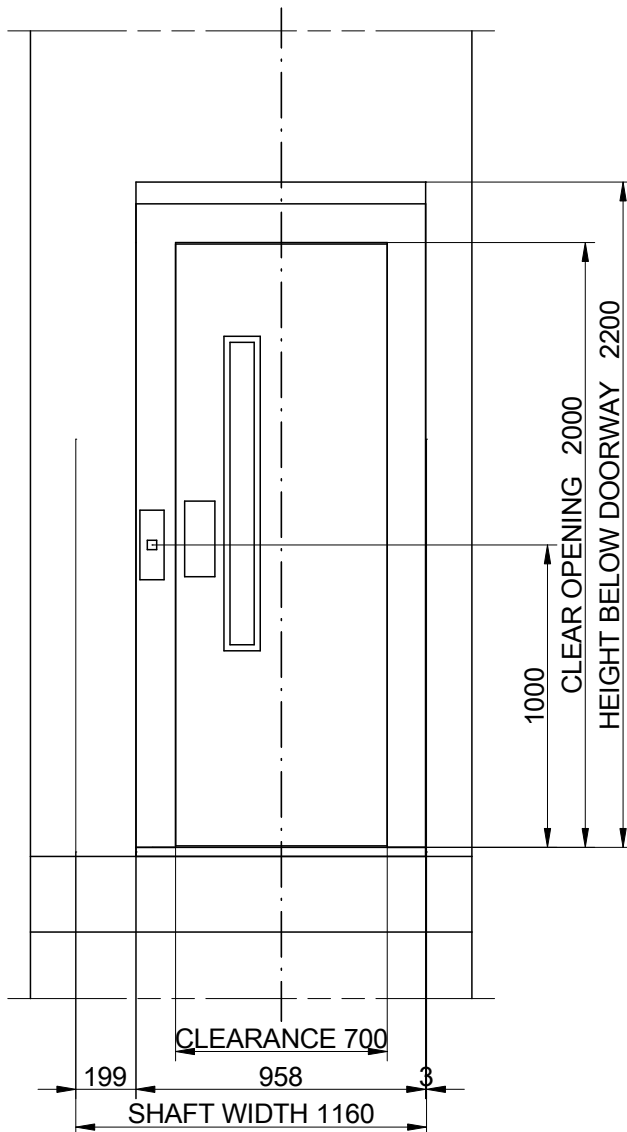
PIT LAYOUT

SCALE(*): 1:15

F-1-602.rev.3

(*)Unbounded dimensions in drawings are indicative and not binding.

STOPS (N°)		4	REV. 0		
CAPACITY (N° PERSONS)		3	REFERENCE:		
NOMINAL LOAD (Kg.)		225			
	DATE	NAME	CLIENT:		TENSION (V.) TRIFASICO.380V FREQUENCY (Hz.) 50
DRAWING	2011		WORK SITUATION:		
VERIFIED					
APPROV.					
MP			MODEL LIFT		SPEED (m/s)
			MP301H MOBI		0.15



DOOR HOLE DETAIL

SCALE(¹): 1:25

F-1-602.rev.3

(¹)Unbounded dimensions in drawings are indicative and not binding.

STOPS (N°) 4
CAPACITY (N° PERSONS) 3
NOMINAL LOAD (Kg.) 225

REV. 0

REFERENCE:



	DATE	NAME
DRAWING	2011	
VERIFIED		
APPROV.		

CLIENT:
WORK SITUATION:

TENSION (V.)
TRIFASICO.380V
FREQUENCY (Hz.)
50

MP

MODEL LIFT

SPEED (m/s)

MP301H MOBI

0.15

WORK BY THE CUSTOMER

SHAFT: The structure of the shaft must be built according to the national building rules. Wall of the shaft must resist a pressure of 60 N/cm². Nominal dimensions according to the drawings. Vertical tolerance from (-0) to (+40 mm.) except door walls. Safety protections fitted. Floor levels signalled. The only use of the shaft must be for a lift platform. The recommended shaft ventilation is 1% of its transversal section.

DOOR WALLS: must be flat and uniform, without holes along landing door width, maintaining 20 mm. between car and landing sills. Without vertical tolerance.

ROOF SHAFT: suspensions hooks in the roof, prepared to resist the loads.

ILUMINATION: minimum in the shaft of 50 Lux, one meter above the car roof and in the shaft pit, even with closed doors, using a lamp 0.5 m. above the pit floor and 0.5 m. under the shaft roof, with intermediate lamps at cilinder side.

LANDING ILUMINATION: 50 Lux at floor level.

CABINET/MACHINE ROOM: easy access, properly ventilated, with own lighting with 200 Lux at the floor level, temperature between 5 °C and 40 °C.

POWER SUPPLY: closed to shaft.


ELECTRIC SUPPLY: including statutory wiring up to the cabinet, with neutral, earth and lighting cables. Main switch must be of stable position (on/off), its position having to be fixed by way of a padlock or similar avoiding an involuntary connection.

EARTHING of all electric installation according to the statutory prescriptions in the harmonizing document CENELEC HD 384-5-54 S1.


PIT: flat, levelled and not dust generator pit floor. Protected against water licking. Able to resist loads according to drawings.

For eventual Rules of Local Buildings, the client is responsible and he will have to control the fulfilment. The present drawing is developed by means of the facilitated information and it has caused the technical documents for the achievement of our products. Eventual MODIFICATIONS which affect their construction, will lead to the inspection of our order confirmation.

COMPENSATORY MEASURES. REDUCED HEIGHT HEADROOM.

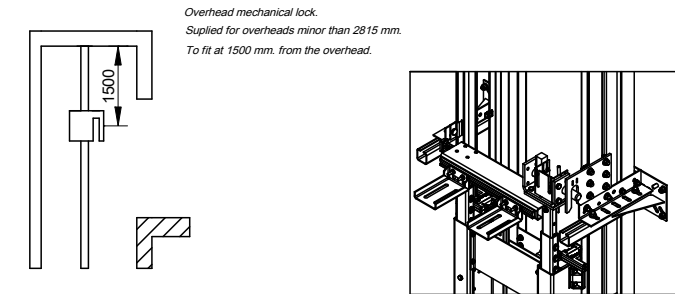

COMPENSATORY MEASURES. REDUCED HEIGHT PIT.

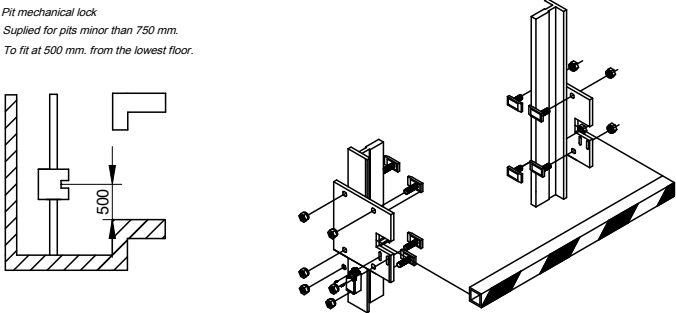

F-1-602.rev.1

DATE	NAME	MODIFICATIONS	REV.

STOPS (N°)		4	REV. 0		
CAPACITY (N° PERSONS)		3	REFERENCE:		
NOMINAL LOAD (Kg.)		225			
DATE	2011	NAME	CLIENT:		TENSION (V.) TRIFASICO.380V FREQUENCY (Hz.) 50
DRAWING			WORK SITUATION:		
VERIFIED					
APPROV.					
MP			MODEL LIFT	SPEED (m/s)	
			MP301H MOBI	0.15	